LED Reverse Bulb Install

Thank you for your purchase of LED reverse bulbs, here is a quick DIY of the install if you have any questions feel free to email or message me with any further questions.

Recommended Tools: Flat head screw driver or trim tool and rubber gloves.

1. Gently pry the inner trunk liner of the trunk lid with the flat head screw driver.

2. Use the flat head screw driver to pull out red tab on yellow plug.

3. After tab is pulled out, push in release button on yellow plug and pull gently down on plug moving it out of the way.

4. Using both hands push in the 3 release tabs to pull down bulb assembly.

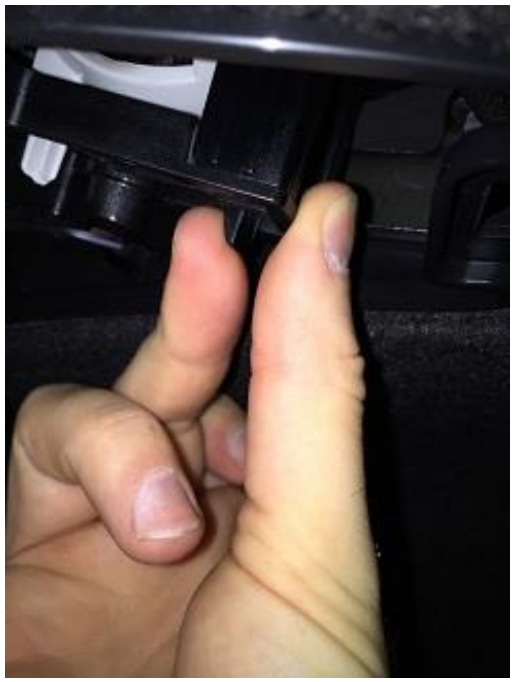

5. Gently pull down assembly this part can be tough, but try and pull evenly and straight down.

6. Once the assembly is removed, remove the outer most bulb. (note that it will be the opposite outer most bulb on the opposite side, the pictures in this DIY reflect the left side)

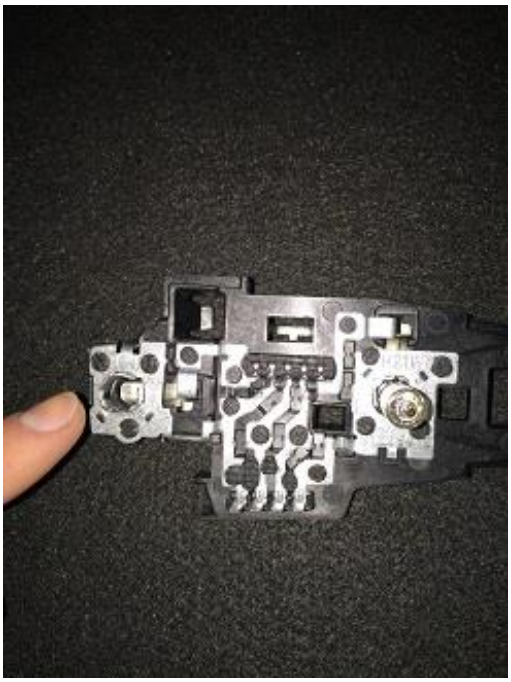

(it is a good practice to not touch bulbs with bare hands, oils from skin can affect the bulb negativly)

7. Place LED bulb back into assembly there will be an opening for the keyed (raised) portion on the bottom half of the bulb.

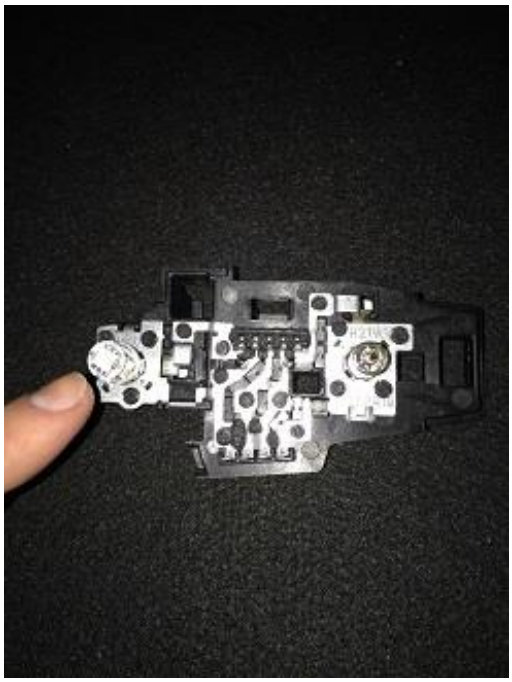

8. Replace assembly opposite of removal, remember to line up the 4 prongs on the assembly with the light housing. Carefully push assembly in to not bend the prongs.

9. Replace yellow plug pushing it in, should go in relatively smooth, and then push the red tab back in.

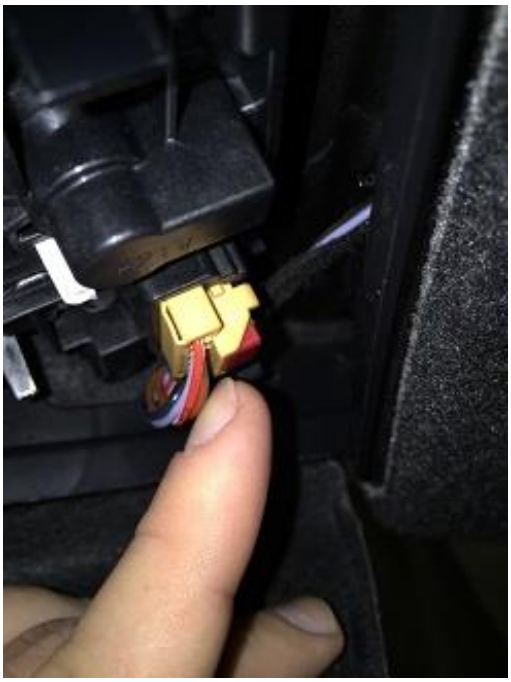

10. Replace liner cover pushing in firmly, and then repeat for the opposite side.

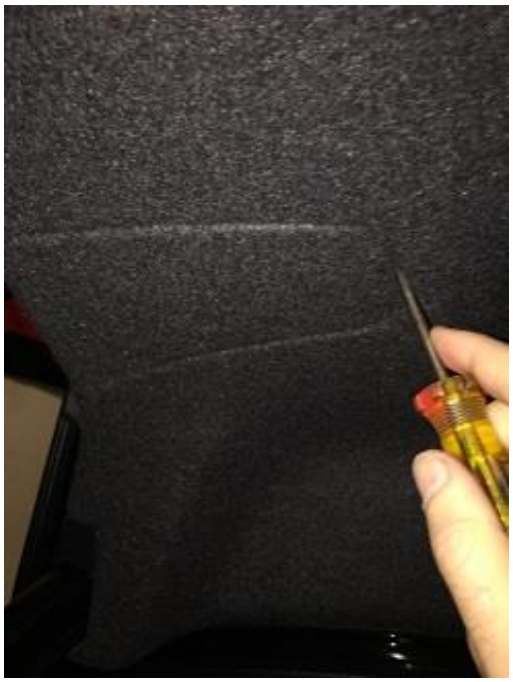

11. Test by turning car to auxiliary mode and putting into reverse.

Done, ENJOY!!!!!